

PANEL1127-370

12.1" TFT High Brightness Industrial PANEL Computer



FEATURES

- ▶ 12.1" TFT 250nit high brightness SVGA LCD
- ▶ NEMA 4/12 front bezel
- ▶ Intel® socket 370 Celeron™/Pentium® III system board
- ▶ Build-in super slim type of CD-ROM or CD-RW
- ▶ Build-in 3.5" IDE type HDD
- ▶ Resistive type of touchscreen
- ▶ One half-size PCI/ISA card expansion

SPECIFICATIONS


Front Bezel	Plastic mylar lamination with IP65, NEMA 4/12 anti-dust/water rugged protection	
LCD PANEL	12.1" TFT Brightness: 250nit View Angle: U/D: 150°	
Main System	Mainboard	SBC8360
	CPU	ZIF socket 370 type processor Intel® Celeron™ 300 up to 733MHz Intel® Pentium® III 500 up to 850MHz
	Core Logic	Intel® 440BX Core Logic controller
	Bus Clock	66/100MHz
	Memory	One 168-pin DIMM socket up to 256MB SDRAM
	Resolution	800 x 600
	Onboard Graphics	C&T 69000 1X AGP 2MB SDRAM Graphic memory
	DIO	4 channel bits of TTL/DTL compatible Digital input/output
	DiskOnChip®	Support M-systems flash disk
	Hard Disk Drive	Enhanced IDE interface 3.5" type
	LAN	32 bit PnP Ethernet controller 10/100 Base-T (RJ-45)
	Watchdog Timer	64 levels timer with time-out intervals from 0.5 - 1600 sec.
	Serial Port	RS-232 x 3 RS-232/422/485 x 1 +5V/+12V power output capability by pin 1 and pin 8, selectable via jumper setting
Parallel	SPP/EPP/ECP supported Configurable to LPT1, LPT2, LPT3 or disable	



Two 4cm system cooling fans



Build-in slim type CD-ROM or CD-RW

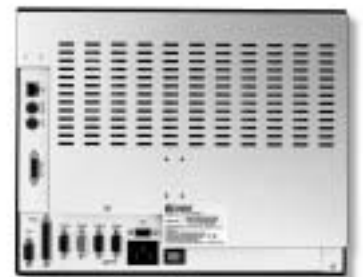

I/O connectors:

- LAN RJ-45
- PS/2 keyboard
- PS/2 mouse
- Ext. FDD
- DIO
- Parallel port
- USB port
- COM1/2/3/4
- VGA port

PANEL1127-370

SPECIFICATIONS

Peripheral Build-in	Slim-type CD-ROM drive
I/O Connectors	D-Sub 9-pin x 1 (male) for RS-232/RS-422/RS-485 D-Sub 9-pin x 3 (male) for RS-232 (One port reserve for touchscreen) D-Sub 25-pin x 1 (female) for parallel D-Sub 15-pin x 1 (male) for DIO PS/2 x 2 for keyboard and mouse RJ-45 x 1 for Ethernet D-Sub 15-pin x 1 (female) for S-VGA output Centronic 26-pin (female) for external floppy disk drive Audio (Line-out, Mic in, Line-in) USB x 2
Expansion Slot	ISA x 1/PCI x 1 share
System Fan	4cm fan x 2
Touchscreen	Resistive type
Power Supply	AC 100-230V, 100W
Dimensions	15.75"(400mm)(W) x 4.34"(110.2mm)(D) x 12.20"(310mm)(H)
Weight	5.0Kg
O/S Supported	Windows® 95/98, Windows® NT, Windows® CE
Environmental	Operation temperature range: 0°C-40°C (32°F -104°F) Relative humidity: 20% ~ 90%, non-condensing

ORDERING INFORMATION

PANEL1127-370	12.1" TFT high brightness industrial PANEL computer
X1 X2	X1 R- resistive type of touchscreen G- without touchscreen
	X2 C- slim type of CD-ROM R- slim type of CD-RW

DIMENSIONS

