

AX61127TM

1U Rackmount Chassis for Extended Dual-Xeon Server MB w/ 4 Swappable Drive Bays



FEATURES

- ▶ Supports 12" x 13" server MB up to dual Xeon processors
- ▶ Four swappable drive trays for SCA or SATA hard drives
- ▶ Optional slim CD-ROM
- ▶ Six high-speed cooling fans
- ▶ 400W power supply for Xeon MB

Optional slide rails
(3 stages temporary lockable with load capacity up to 140 lb or 63.6kg)




1 x PCI 64-bit



1 x PCI 32-bit

Optional riser card

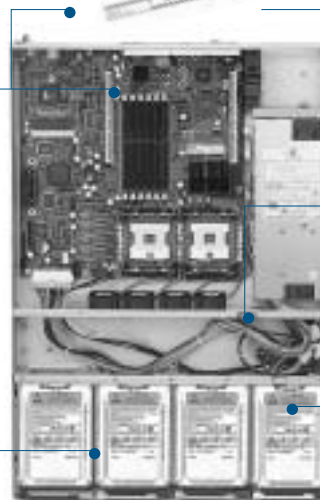

Equipped with a micro switch on the top of the chassis. If the illegal user opens the chassis, the alarm beep will be on.

4 swappable drive bays w/ SCA or SATA connector

Optional slim CD-ROM or CD-RW

SPECIFICATIONS

| | |
|------------------------------------|---|
| Standard Color | Black |
| Construction | Heavy-duty cold-rolled steel |
| Form Factor | 12" x 13" ATX MB |
| Drive Capacity | 4 x removable HDD (SCA or SATA) & 1 x slim CD-ROM |
| Cooling | Up to six 4cm high-speed ball-bearing fans |
| Front Panel Indicators | 1 x power on/off; 4 x HDD (One on each removable drive) |
| Front Panel Controls | 1 x power on/off; 1 x system reset |
| Pre-punched Panel | Rear for Intel® SCB2, 7500, 7501 & TYAN S2688 (customized rear panel available) |
| Optional Expansions | PCI 1 riser card w/ 1-slot 32-bit or 64-bit |
| Speaker | One 0.3W speaker |
| Operation Temperature Range | 0°C (32°F) ~ 35°C (95°F) |
| Dimensions (W x D x H) | 19"(482.6mm) x 25.2"(640mm) x 1.75"(44mm) |

* All the specifications and photos are subjected to be changed without notice.

POWER SUPPLY OPTIONS

| Items | Specifications | | |
|--------------------|------------------------------|---|---------------|
| | Input | Output | MTBF |
| EPS/ATX 400W (PFC) | AC 115/230V (Auto switching) | +5V @ 35A +12V @ 24A -5V @ 0.5A -12V @ 0.8A +3.3V @ 25A +5V _{sb} @ 2A | 100,000 hours |

ORDERING INFORMATION

| | |
|---------------------------|---|
| AX61127TM/4S/E400P | 1U rackmount chassis, with 4 SCA removable drivers, EPS/ATX 400W power supply with PFC |
| AX61127TM/4A/E400P | 1U rackmount chassis, with 4 SATA removable drivers, EPS/ATX 400W power supply with PFC |

OPTIONAL ITEMS

| | |
|----------------|------------------------------|
| AX96113 | 1-slot PCI 32-bit riser card |
| AX96117 | 1-slot PCI 64-bit riser card |
| AX-SLCD | Slim-line CD-ROM |
| AXSLCDR | Slim-line CD-RW |
| SR-26 | 26" slide rail |

Slim heatsink for Xeon processor

DIMENSIONS

